


[>blackline]

- solid 4N OFC conductors
- low density insulation
- effective multi-layer shielding
- T2 / T3 balanced architecture
- ImpedanceControl™ technology
- very high conductivity
- high-end connectors

*"The only
truth is
music."
Jack
Kerouac*

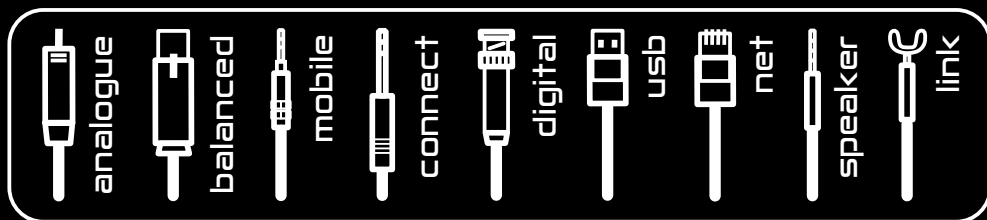

cable4®
handcrafted in EU

"Performance line for real audiophiles. ImpedanceControl™ technology keeps signal flow steady even if cable is bended. Small amount of natural filtering helps to reduce jitter and harmonic distortion."



[>black analogue]

- analogue interconnect with ImpedanceControl™
- 18AWG main and doubled minus solid OFC conductor
- multi-contact HollowTip™ RCA connectors
- termination: 2RCA-2RCA
- standard length: 0.75m, 1m, 1.5m, 2m

[>black balanced]

- dual shielded balanced analogue interconnect
- 18AWG solid OFC conductors w/ ImpedanceControl™
- proprietary HollowTip™ XLR connectors
- termination: 2XLR-2XLR
- standard length: 1m, 2m, 3m



[>black mobile / connect]

- solid OFC conductors with 2x to 4x shielding
- custom made connectors / HollowTip™ RCA
- connect: 3.5(6.3)-2RCA, 3.5-2x3.5(miniXLR)mono
- mobile: 3.5-3.5 standard length: 0.75m, 1m, 1.5m

[>black digital]

- true 75Ohm with 18AWG solid OFC conductors
- proprietary HollowTip™ RCA or BNC connectors
- termination: 2RCA-2RCA, 2RCA-2BNC, 2BNC-2BNC
- standard length: 0.7m, 1m, 1.5m, 2m



[>black USB / NET]

- 24AWG solid 4x shielded OFC conductors
- termination: USB A - USB B / RJ45 - RJ45
- standard length: 1m, 1.5m, 2m



[>black speaker / link]

- terminated dual shielded speaker cable or links
- 13AWG solid high-grade OFC conductors
- low mass beryllium-copper Z-plugs or Spades
- termination: 2BAN-2BAN,... 2SPADE-2SPADE (SW only)
- standard length: 2x1.5m, 2x2m, 2x2.5m, 2x3m + links

cable4®
www.cable4.eu