


[>clearline]

- low-stranded 4N OFC conductors
- medium density insulation
- triple layer shielding
- T4 balanced architecture
- heavy gauge construction
- pure silver plated OFC braid

*"Music can change
the world because it
can change people."
Bono*

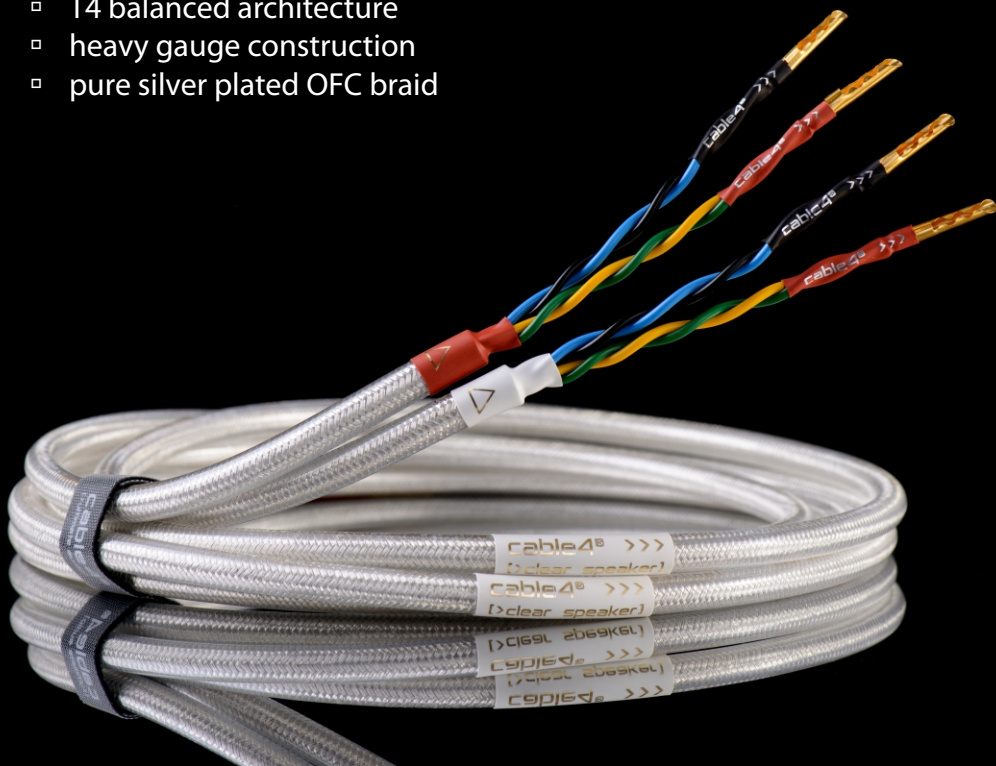

analogue



power



speaker

cable4®
handcrafted in EU

"Heavy gauge line for great music impression. The only series with stranded conductors for bigger diameter of wires and more amps to be transmitted. Works best in bigger systems or as fundamental power solution. Besides it's really beautiful."




[>clear analogue]

- pseudo-balanced analogue interconnect
- 14AWG main and doubled minus OFC conductor
- effective triple shielding
- multi-contact HollowTip™ RCA connectors
- carbon - aluminium housing
- termination: 2RCA-2RCA
- standard length: 1m

[>clear power]

- triple shielded mains power cable
- 14AWG low-stranded OFC conductors
- proprietary IEC and SHUKO connectors
- very high conductivity and good cooling
- termination: EU-IEC, CZ/SK-IEC
- optional IEC 16A/240V
- standard length: 1m, 1.5m, 2m



[>clear speaker]

- terminated triple shielded speaker cable
- 11AWG low-stranded OFC conductors
- low mass beryllium-copper Z-plugs or Spades
- termination: 2BAN-2BAN, 2BAN-2SPADE, 2SPADE-2BAN, 2SPADE-2SPADE
- optional SWB (2/4) or BW (4/4) configuration
- standard length: 2x1.5m, 2x2m, 2x2.5m, 2x3m