


# [>greyline]

- solid 4N OFC conductors
- medium density insulation
- aluminium foil shielding
- T4 balanced architecture
- very high conductivity
- high-end connectors



*"Music is  
everybody's  
business..."  
John Lennon*

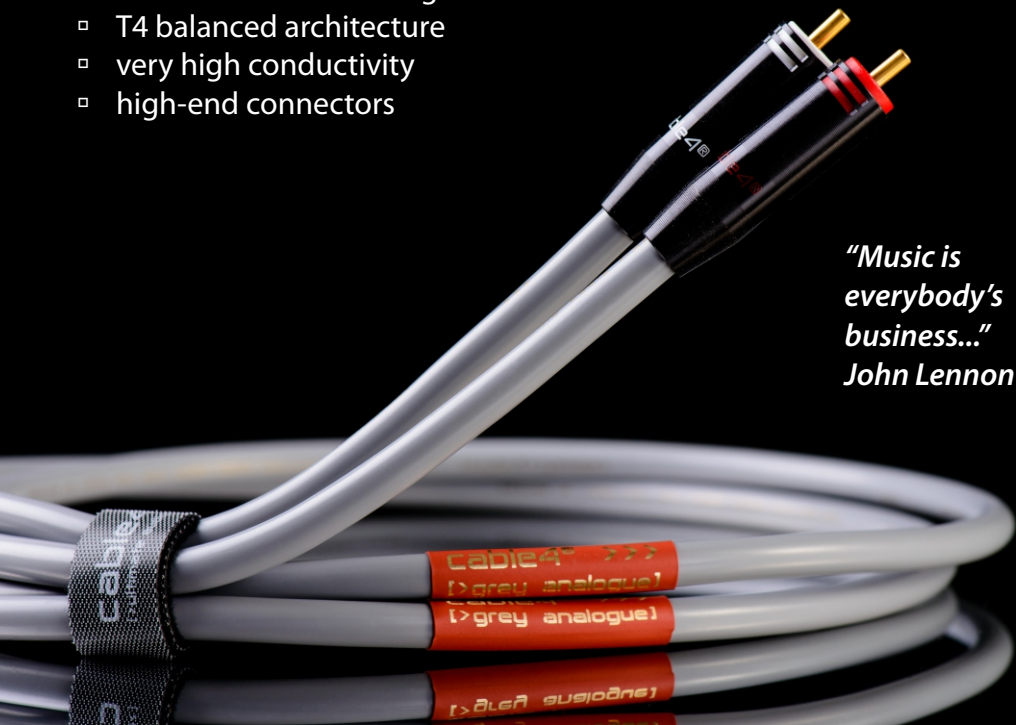

analogue



balanced



speaker



optical

**cable4<sup>®</sup>**  
handcrafted in EU

**"Our most affordable line for high-fidelity enthusiasts with tighter budget.  
 Similar components and design as more advanced black series without  
 ImpedanceControl™ technology with almost the same feel.  
 Works well in almost any hi-fi or high-end set-up.  
 Great audiophile experience for everyone!"**



### [>grey analogue]

- ▣ shielded pseudo-balanced analogue interconnect
- ▣ 18AWG main and doubled minus solid OFC conductor
- ▣ multi-contact HollowTip™ RCA connectors
- ▣ aluminium housing for best shielding
- ▣ termination: 2RCA-2RCA
- ▣ standard length: 0.75m, 1m, 1.5m, 2m

### [>grey balanced]

- ▣ shielded balanced analogue interconnect
- ▣ 18AWG solid OFC conductors
- ▣ proprietary HollowTip™ XLR connectors
- ▣ zinc housing for good shielding and value
- ▣ termination: 2XLR-2XLR
- ▣ standard length: 1m, 2m, 3m



### [>grey optilink]

- ▣ 18 AWG high-quality polymer optical conductor
- ▣ custom made TOSLINK and 3.5mm connectors
- ▣ real performance advantage over competition
- ▣ termination: TOS-TOS, TOS-3.5mm (1-2m only)
- ▣ optional TOS-3.5mm adapter
- ▣ available length: 0.7m, 1m, 1.5m, 2m, 3m, 5m, 8m, 10m

### [>grey speaker]

- ▣ terminated shielded speaker cable
- ▣ 15AWG solid OFC conductors
- ▣ low mass beryllium-copper Z-plugs or Spades
- ▣ termination: 2BAN-2BAN, 2BAN-2SPADE, 2SPADE-2BAN, 2SPADE-2SPADE (SW only)
- ▣ standard length: 2x2m, 2x2.5m, 2x3m

