


[>superblack]

- high-grade solid OFC conductors
- low density insulation
- effective multi-layer shielding
- complex design T3 architecture
- ImpedanceControl™
- NaturalFilter™

*"Music is the
strongest form
of magic."
Marilyn Manson*

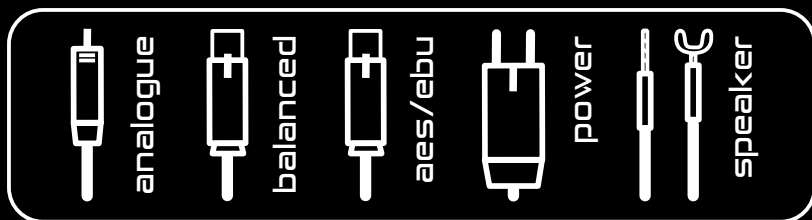

cable4®
handcrafted in EU

High coherence line for well balanced hi-fi systems. Just listen!
ImpedanceControl™ technology keeps signal flow steady and timing precise.
NaturalFilter™ technology reduces jitter and distortion."



[>superblack analogue]

- triple shielded complex design analogue interconnect
- 15AWG high-grade solid OFC conductors
- carbon-aluminium HollowTip™ RCA connectors
- termination: 2RCA-2RCA
- standard length: 1m, 1.5m, 2m

[>superblack balanced]

- triple shielded balanced analogue interconnect
- 15AWG high-grade solid OFC conductors
- CNC machined HollowTip™ XLR connectors
- termination: 2XLR-2XLR
- standard length: 1m, 1.5m, 2m



[>superblack AES/EBU]

- triple shielded balanced digital interconnect
- high-grade solid OFC conductors
- CNC machined HollowTip™ XLR connectors
- termination: XLR-XLR
- standard length: 1m, 1.5m

[>superblack power]

- triple shielded mains power cable
- 15AWG high-grade solid OFC conductors
- proprietary IEC and SHUKO connectors
- high conductivity and good cooling
- termination: EU-IEC, CZ/SK-IEC
- standard length: 1m, 1.2m, 1.5m, 2m



[>superblack speaker]

- terminated triple shielded speaker cable
- 12AWG high-grade solid OFC conductors
- low mass beryllium-copper Z-plugs or Spades
- termination: 2BAN-2BAN, 2BAN-2SPADE, 2SPADE-2BAN, 2SPADE-2SPADE (SW only)
- standard length: 2x1.5m, 2x2m, 2x2.5m, 2x3m